


# Technical data

240g/m<sup>2</sup> - 2 sides coated

**GRIP**  
**SHEET**®

TEST	UNIT	NORM	VALUE	SPECIFICATIONS
■ Weight final product	g/m <sup>2</sup>	NF EN ISO 536, 1996	243	238 - 249
■ Thickness	µm	NF EN ISO 534, 2005	329	314 - 343
<b>BREAKING STRENGTH IN TENSION</b>				
■ Resistance	kN/m	NF EN ISO 1924.2, 1995	SM	10,9
			ST	7,1
■ Rupture length	meters		SM	4549
			ST	2967
■ Elongation	%		SM	2,6
			ST	6,5
■ Burst Index	kPa	NF EN ISO 2758, 2004	462	
■ Friction coefficient	°	NF Q 03-083,1993	SM	27,9
■ air porosity	cm <sup>3</sup> /m <sup>2</sup> .Pas	NF ISO 5636.3, 1992		2,5
■ toxicity				None
■ Skin irritation				None
■ Reuse		NF EN 13429		Yes
■ Recyclability				Yes

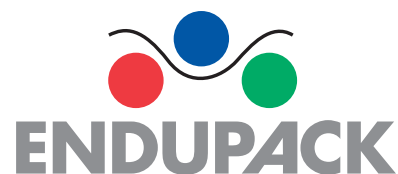

**ENDUPACK**

- Pallet quantity = 3,500 sheets
- % of tolerance : 2%
- Warehousing conditions: Insensitive to heat/cold