


Technical data

300g/m² - 2 sides coated

GRIP
SHEET®

TEST	UNIT	NORM	VALUE	SPECIFICATIONS
■ Weight final product	g/m ²	NF EN ISO 536, 1996	332	322 - 341
■ Thickness	µm	NF EN ISO 534, 2005	617	576 - 658
BREAKING STRENGTH IN TENSION				
■ Resistance	kN/m	NF EN ISO 1924.2, 1995	SM	10,4
			ST	4,8
■ Rupture length	meters		SM	3197
			ST	1488
■ Elongation	%		SM	1,3
			ST	2,1
■ Burst Index	kPa	NF EN ISO 2758, 2004	318	
■ Friction coefficient	°	NF Q 03-083,1993	SM	43,8
■ air porosity	cm ³ /m ² .Pas	NF ISO 5636.3, 1992		22
■ toxicity				None
■ Skin irritation				None
■ Reuse		NF EN 13429		Yes
■ Recyclability				Yes

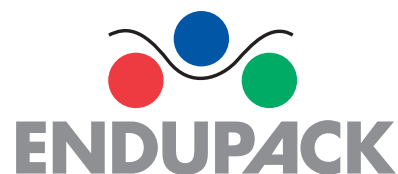

**ENDUPACK**

- Pallet quantity = 1,500 sheets
- % of tolerance : 2%
- Warehousing conditions: Insensitive to heat/cold