




Technical datasheet

Stick'N Grip, 105g/m²,
100% non-skid recto and adhesive verso

**STICK'N
GRIP**

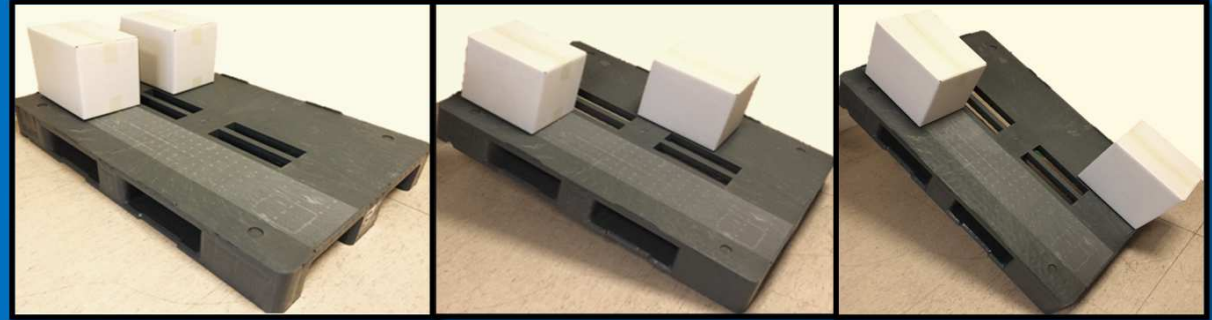

TEST	UNIT	NORM	VALUE	DEVIATION
Weight	g/m ²	NF EN ISO 536, 1996	135	130-140
MECHANICAL PROPERTIES				
Breaking strength in traction	daN/mm ²	ASTM D.882	18	
Elongation	%	ASTM D. 882	140	
Opacity	%	ASTM D.1003	12	
GENERAL PROPERTIES				
Friction coefficient		NF Q 03-083, 1993	0,86	
Tilt angle	°	NF Q 03-083, 1993	40	
Reuse			YES	
Recyclability			NO	


ENDUPACK

- Quantity per pallet = to determine
- % of variation on the length : 2%
- Storage conditions : no modifications due to warm and cold