



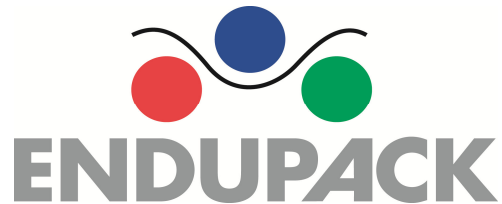
# Technical datasheet

Stick'NGrip, 105g/m<sup>2</sup>,  
100% non-skid recto and adhesive verso

**STICK'N  
GRIP**

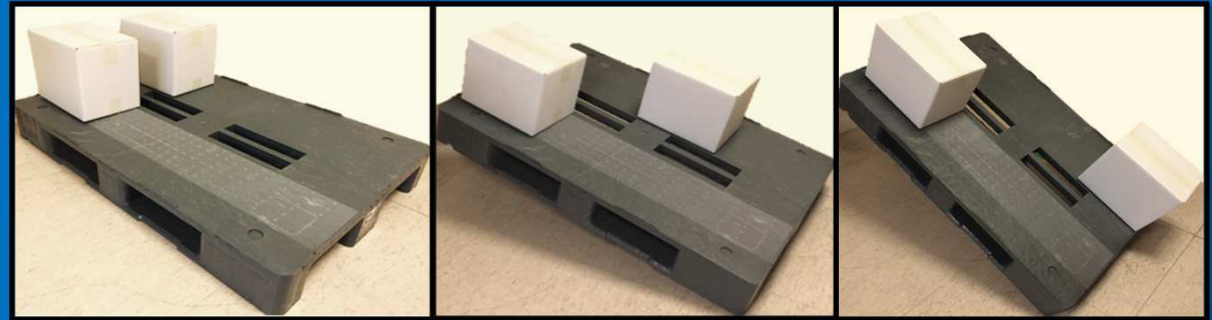

| T E S T U N I T N O R M       | VALUE               | DEVIATION           |      |  |
|-------------------------------|---------------------|---------------------|------|--|
| Weight                        | g/m <sup>2</sup>    | NF EN ISO 536, 1996 | 135  | 130-140  |
| <b>MECHANICAL PROPERTIES</b>  |                     |                     |      |  |
| Breaking strength in traction | daN/mm <sup>2</sup> | ASTM D.882          | 18   |  |
| Elongation                    | %                   | ASTM D. 882         | 140  |  |
| Opacity                       | %                   | ASTM D.1003         | 12   |  |
| <b>GENERAL PROPERTIES</b>     |                     |                     |      |  |
| Friction coefficient          |                     | NF Q 03-083, 1993   | 0,86 |  |
| Tilt angle                    | °                   | NF Q 03-083, 1993   | 40   |  |
| Reuse                         |                     |                     | YES  |  |
| Recyclability                 |                     |                     | NO   |  |



**ENDUPACK**

- Quantity per pallet = to determine
- % of variation on the length : 2%
- Storage conditions : no modifications due to warm and cold